



## 6700 Lift & Slide

Sliding, Lift and Slide Doors - Thermally Broken  
 Air/Water isolation with EPDM gaskets (for Lift and Slide) / Brushes for Sliding Doors

### Usage

Sliding, Lift and Slide Doors - Thermally Broken  
 Air/Water isolation with EPDM gaskets (for Lift and Slide) / Brushes for Sliding Doors

### Polyamide

Technoform Bautec 24mm(frame)-  
 22mm(sash) (Germany)

### Mechanism Lift and Slide

HAUTAU (Germany)

### Maximun Load per Sliding Sash

200Kg or 250 Kg (with extra rollers)

### Handles


Hoppe (Swiss - German)

### Dimensions

Frame+Sash=122mm, Middle Section=  
 89mm

### Thermal transmittance

$U_w=2.22 \text{ W}/(\text{m}^2.\text{K})$  (Dimensions:  
 1800X2300mm,  
 $U_g=1.1 \text{ W}/\text{m}^2.\text{K}$  - Solar Control-  
 Argon)

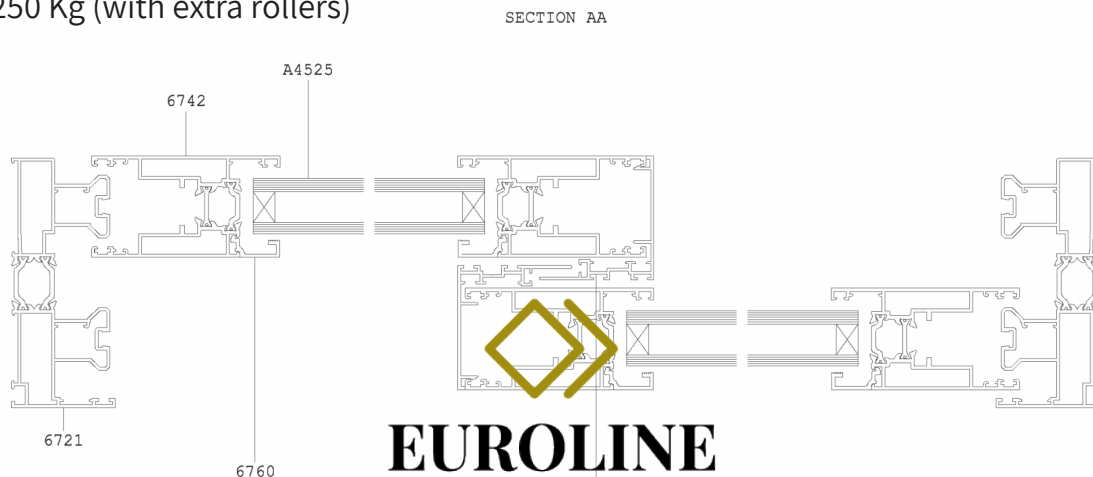

**EUROLINE**  
 WINDOWS & DOORS

INTERNAL SIDE