



FD4600 is a brand new Bi-Folding door system, offering extremely high performance and impressive, out of competition, technical characteristics.

Min. face height

(high threshold): 127.1 mm

Min. frame height

(low threshold): 24 mm

Min. rail width:

73 mm

Sash weight:

120 Kgr


Glass thickness:

28-57 mm

Polyamides

20-30 mm

- High level of thermal insulation (Uf values down to 2.1 W/m2K) due to 30 mm polyamides.
- Exceptional water tightness, functionality, reliability and comfort.
- Suitable for large openings, every conceivable configuration achievable up to 14 leaves (7 Left – 7 Right) with maximum height 3 m and width of 1.20 m for each leaf.
- Ultra-smooth bottom running by using specially designed rolling hinges carrying maximum weight of 120 Kgr per leaf.
- Possibility of open corners without any post.
- Able to open inward or outward door with locking system.
- Possibility of even number of openings (2, 4 etc.).
- Multiple threshold options.
- Special hinge with integrated built-in handle for easy locking.
- In and outward opening using the same profiles.
- Perfect choice for private homes, offices, restaurants and recreational areas.

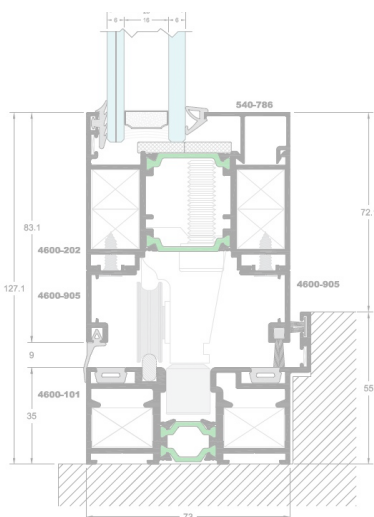

EUROLINE

WINDOWS & DOORS